S380D

DOUBLE STRAIGHT LOADER





The \$380D is the most popular model in the Freeway straight loader range, and there are plenty of reasons for this.

The S380D is a model for horse owners in serious competition who require extra room for themselves as well as their horses. A roomy I800mm from chest-bar to front allows for accommodation facilities and other creature comforts and is an impressive all-rounder float for dressage, hunting, eventing, show-jumping, endurance, trekking and rodeo.













DOUBLE STRAIGHT LOADER



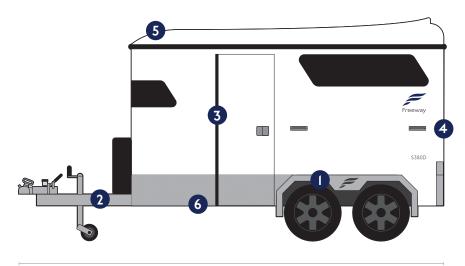

4800mm



2150mm

FREEWAY TOW-OLOGY™

THE TECHNOLOGY BEHIND FREEWAY INNOVATIONS

- PRO-BALANCETM
 Super smooth tow/ride suspension
- **2** DOUBLE-DIP GALVANISED CHASSIS Super strong chassis - BUILT TO LAST
- CUSTOMISATION
 Your Freeway, your way
- PRO-LOADER™
 Spring loaded slam lock rump doors
- HORSE WHISPERA™

Aerodynamically designed body and roof

6 FREEWAY IO-YEAR
Worldwide chassis warranty

FEATURES

- Freeway IO year chassis warranty
- Freeway Double-dip galvanised
 NZ High Grade AS/NZS II63 steel chassis
- Freeway Pro-Balance[™] load share suspension system
- Fully welded joins from chassis to upper frame, no mechanical fixings
- Freeway Pro-Loader™ spring loaded, quick release, slam lock rump doors
- Freeway Horse Whispera™
 aerodynamically designed body and roof
- Galvanised and professionally painted upper frame for added durability
- Colorsteel® MAXX® outer cladding
- Removable, padded swinging divider
- Solid fibreglass moulded roof
- Tandem axle
- Non-slip pimple grip rubber flooring glued/ sealed to galvanised NZ steel horse area subfloor

- 400mm high alloy stone guard skirt
- Tough, tinted anti-glare front perspex window
- Durable high density polyethylene internal side kick plates
- Hard wearing hydraulic disc braking system
- Duo-fit coupling fits 50mm and I 7/8" ball sizes
- Heavy duty jockey wheel
- External LED indicator/stop lights
- Full height lockable side entry door
- Centre adjustable roof air vent
- Warrant of Fitness
- Optional extras pricelist on request
- Note: Images may include optional extras

SPECIFICATIONS

Box length	3800mm
Box width	1600mm
Subframe RHS thickness	4mm
Upper frame SHS thickness	2mm
Colorsteel® MAXX® cladding thickness	0.55mm
Chest bar to centre of curved front	1800mm
Horse bay width	740mm
Horse bay length	1900mm
Internal height in storage area	2200mm
Internal height of horse bay	2300mm
Overall width	2l50mm
Drawbar length	1000mm
Step up height to horse bay	300mm
Approx. tow weight unladened	1050kg
GVM	2500kg
Number of horses	2
Length overall	4800mm

CUSTOM BUILT IN NZ TO YOUR REQUIREMENTS

